


Profi-Series

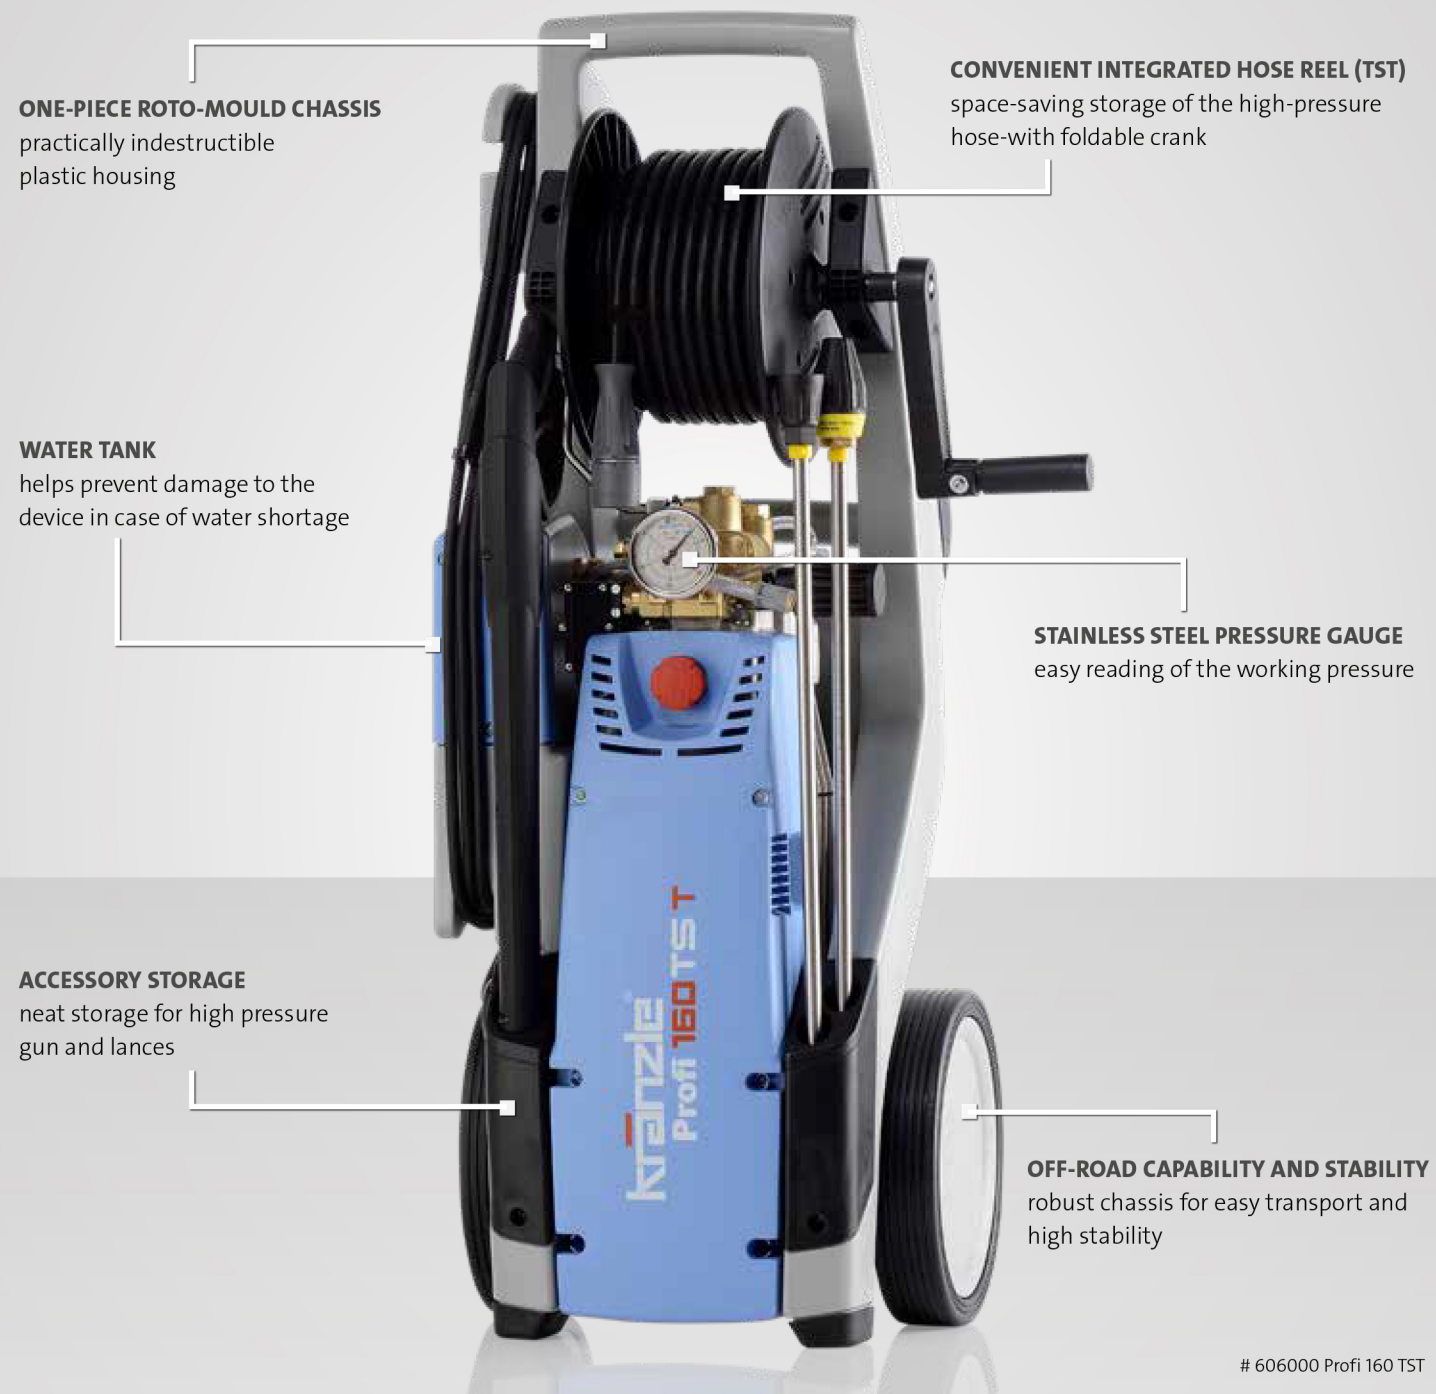

ONE-PIECE ROTO-MOULDED CHASSIS
practically indestructible plastic housing

CONVENIENT INTEGRATED HOSE REEL (TST)
space-saving storage of the high-pressure hose-with foldable crank

WATER TANK
helps prevent damage to the device in case of water shortage

STAINLESS STEEL PRESSURE GAUGE
easy reading of the working pressure

ACCESSORY STORAGE
neat storage for high pressure gun and lances

OFF-ROAD CAPABILITY AND STABILITY
robust chassis for easy transport and high stability

606000 Profi 160 TST

► **ACCESSORIES** | starting on page 22



EQUIPMENT

- Quick release plug-in system D12
- Total-Stop system
- Pressure regulation
- Cleaning Agent Intake
- Direct suction: Suction height 2.5 m
- Detachable water tank: Volume 1.3 liters



VARIANT - NON-MARKING

NOM conversion kit Ord.no. **42260**

For further information on NON-Marking please refer to page 74

MODEL	Profi 160 TST	Profi 195 TST	Profi 175 TST
Ord.no. TST incl. hose drum	606000	606010	606100

TECHNICAL SPECIFICATIONS

Operating pressure	bar MPa	30-140 3-14	30-170 3-17	30-150 3-15
Water output	l/min l/h	11 660	8 480	12 720
Admissible overpressure	bar MPa	160 16	195 19.5	175 17.5
Motor speed	Rpm	1400	1400	1400
Connection	V ~ Hz A	230 1 50 14.3	230 1 50 14.3	400 3 50 7.2
Power intake Power output	kW	3.2 2.5	3.2 2.5	3.8 3.0
Power supply cable	m	5	5	5
Dimensions L x W x H	mm	355 375 980	355 375 980	355 375 980
Weight	kg	45	45	45

EQUIPMENT

High-pressure hose	m Ord.no.	15 (DN 6) 43829	15 (DN 6) 43829	15 (DN 6) 43829
Trigger gun with safety catch	Model Ord.no.	M2000 12481	M2000 12481	M2000 12481
Stainless steel lance with flat-jet nozzle	Nozzle Ord.no.	● 042 12435-M20042	○ 03 12435-M2003	● 042 12435-M20042
Lance with Dirtkiller	Nozzle Ord.no.	● 042 12438-042	○ 03 12438-03	● 042 12438-042

